

11/22/00

JC950 U.S. PTO

11-27-00

A

PATENT  
Docket No. PD-990166A  
CUSTOMER NO.: 020991

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE  
CONTINUATION-IN-PART APPLICATION TRANSMITTAL LETTER  
Under 37 C.F.R. 1.53(b)(2)

JC950 U.S. PTO

09/7/2000

11/22/00

Certification under 37 CFR 1.10 (if applicable)

EK685243259US

EXPRESS MAIL mailing number

November 21, 2000

Date of Deposit

I hereby certify that this application is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Commissioner of Patents and Trademarks, Washington, D.C. 20231.

Janet Bollinger

(Type or printed name of person mailing application)

(Signature of person mailing application)

Anticipated Classification of  
this Application:

Class \_\_\_\_\_ Subclass \_\_\_\_\_

DATE: November 21, 2000  
Prior Application: SN 09/539,964  
Examiner:  
Art Unit: 2749

Assistant Commissioner for Patents  
Washington, D. C. 20231

Sir,

This is a request for filing a

☒ Continuation-in-Part )

Application under 37 CFR 1.53(b)(1) of pending prior application

\_\_\_\_ Divisional )

) Serial No. 09/539,964, filed on March 31, 2000

of Harold Rosen, et al.

for GEO STATIONARY COMMUNICATIONS SYSTEM WITH MINIMAL DELAY

1. ☐ Enclosed is a complete copy of the prior application, including the declaration as originally filed.2. ☒ The filing fee is calculated below:

CLAIMS AS FILED IN THE PRIOR APPLICATION  
LESS ANY CLAIMS CANCELLED AND/OR PLUS ANY CLAIMS ADDED BY AMENDMENT BELOW

| For:                      | Number<br>Filed | Number<br>Extra | Rate         |                  |
|---------------------------|-----------------|-----------------|--------------|------------------|
| Basic Fee                 |                 |                 |              | \$ 710.00        |
| Total Claims              | 27              | -20 =           | 7 x \$ 18.00 | \$ 126.00        |
| Independent Claims        | 4               | -3 =            | 1 x \$ 80.00 | \$ 80.00         |
| Multiple Dependent Claims |                 |                 | + \$270.00   | \$               |
| <b>TOTAL FILING FEE :</b> |                 |                 |              | <b>\$ 916.00</b> |

3. ☒ Please charge Deposit Account No. 50-0383 of Hughes Electronics Corporation, El Segundo, California, in the amount of \$ **916.00**. The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment, to that account.

11/22/00  
3960 U.S. PAT. & TM. OFF. 11/22/00

The Commissioner is hereby authorized to charge any fees which may be required or to credit any overpayment to Deposit Account No. 50-0383. This letter is submitted in triplicate for charge purposes.

5. ☒ The Commissioner is further hereby authorized to charge to the said above Deposit Account No. 50-0383, pursuant to 37 CFR 1.25(b), any fees whatsoever which may properly become due or payable, as set forth in 37 CFR 1.16 to 1.17 inclusive, for the entire pendency of this application without specific additional authorization.
6. ☐ Cancel in this application original claims \_\_\_\_\_ of the prior application before calculating the filing fee.
7. ☒ Amend the specification by inserting before the first line the sentence:  
-- This is a continuation-in-part of application Serial No. 09/539,964 filed March 31, 2000 .--
8. ☐ Transfer the drawings from the prior application to this application and abandon said prior application as of the filing date accorded this application. A duplicate copy of this letter is enclosed for filing in the prior application file.
9. ☒ New drawings are enclosed.
10. ☒ The prior application is assigned to HUGHES ELECTRONICS CORPORATION.
11. ☒ The power of attorney in the prior application is to Michael W. Sales, Registration No. 30,213, Vijayalakshmi D. Duraiswamy, Registration No. 31,505.
- a. ☒ The power appears in the original papers in the prior application.
- b. ☐ Since the power does not appear in the original papers, a copy of the power in the prior application is enclosed.
- c. ☐ A new power of attorney is enclosed.
- d. ☒ Address all future communications to: Customer Number 020991, Hughes Electronics Corporation, Patent Docket Administration, Bldg. 001, M/S A109, PO Box 956, El Segundo, CA 90245-0956.
12. ☐ A preliminary amendment is enclosed.
13. ☐ I hereby verify that the attached papers are a true copy of prior application Serial No. \_\_\_\_\_ as originally filed on \_\_\_\_\_.
14. ☒ Information Disclosure Statement with form PTO-1449 and references.

The undersigned declares further that all statements made herein of his or her own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

November 21, 2000  
Date

  
Michael W. Sales Registration No.: 30,213  
Attorney or Agent of Record

CUSTOMER NUMBER 020991  
HUGHES ELECTRONICS CORPORATION  
Patent Docket Administration  
Bldg. 001, M/S A109  
PO Box 956  
El Segundo, CA 90245-0956  
Telephone: 310-662-9917  
Date: November 21, 2000

PATENT  
PD-990166A

GEO STATIONARY COMMUNICATIONS SYSTEM WITH MINIMAL DELAY

Inventors: Harold Rosen  
Donald C. D. Chang  
Ming U. Chang  
Weizheng Wang  
John I. Novak, III  
Wah L. Lim

BACKGROUND OF THE INVENTION

1. Field of the Invention

This invention relates in general to wireless communications systems, and in particular to a geo-stationary communications system with minimal delay.

2. Description of the Related Art

Communications satellites have become commonplace for use in many types of communications services, e.g., data trunking, voice communications, television broadcast, and other data transfer applications. As such, satellites transmit and receive large amounts of signals, used in either a "bent pipe" or "processing" payload configuration to transmit signals to desired geographic locations on the Earth's surface with multiple spot beams.

Because of the increase in satellite usage, the available resources on a given satellite have been completely utilized without providing enough bandwidth service to a desired geographic region. As such, users on the ground must either go without the satellite service, accept a reduced Quality of Service (QoS) for the satellite service, or timeshare the satellite service with other users, none of which are acceptable for users that require access to the satellite service at any given time. Further, the round-trip delay in communicating with satellites in geostationary (GEO) orbits approaches one half of a second, which can introduce data latencies that are troublesome in many applications. Mid-Earth orbit (MEO) and Low-Earth orbit (LEO) satellite constellations can provide improved performance over GEO satellite constellations, but these performance improvements are obtained at the expense of system complexity and cost.

It can be seen, then, that there is a need in the art for a communications system that provides high-speed and low latency access to the Internet and other terrestrial networks to a large number of users. The present invention satisfies that need

### SUMMARY OF THE INVENTION

To overcome the limitations in the prior art described above, and to overcome other limitations that will become apparent upon reading and understanding the present specification, the present invention discloses a method for communicating and a communications system apparatus. The apparatus comprises a communications platform and a gateway communicatively coupleable with a terrestrially-based network. The communications platform is disposed in a stratospheric location and transponds information between at least one of a plurality of user terminals and the gateway in essentially a bent pipe fashion. The method comprises the steps of receiving a first signal from the user terminal having an antenna in a stratospherically-based communication platform that maintains an apparent position relative to the user terminal within a beamwidth of a user terminal antenna and transponding the first signal from the stratospherically based communications platform to a gateway ground station.

The present invention provides high-speed access to the Internet and other terrestrial networks through a wireless communication system. The present invention also provides high-speed access to such networks for a large number of densely populated users with minimal data latency.

### BRIEF DESCRIPTION OF THE DRAWINGS

Referring now to the drawings in which like reference numbers represent corresponding parts throughout:

- FIG. 1 illustrates a system diagram of one embodiment of the present invention;
- FIG. 2 illustrates a typical payload block diagram used with the present invention;
- FIG. 3 illustrates a typical platform configuration used with the present invention;
- FIG. 4 is a diagram of a gateway showing a plurality of gateway antennae; and
- FIG. 5 is a flow chart illustrating exemplary steps used to practice the present invention.

### DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

In the following description of the preferred embodiment, reference is made to the accompanying drawings which form a part hereof, and in which is shown by way of

illustration a specific embodiment in which the invention may be practiced. It is to be understood that other embodiments may be utilized and structural changes may be made without departing from the scope of the present invention.

5

### Overview Of Related Art

Communications systems have been enhanced through the use of satellite transmission links. Communications satellites are typically used in a "bent pipe" scenario, where the data is transmitted up ("uplinked") to the satellite from a ground station, and the satellite relays the uplink data down ("downlinks") to another geographically distant ground station. Communication satellites can also operate in a similar manner to cellular telephone systems, where the communication satellite provides spot beams to specific, distinct geographic locations. This allows for each location to receive different information if desired, e.g., one location can receive a local event for that region, while simultaneously, another location can receive a local event for that region. In addition, frequency resources can be reused in different beams.

However, communications satellites are typically deployed in GEO orbits, which place them at a distance of 35,788 kilometers (km) above the Earth's surface. Although electromagnetic signals travel at the speed of light, these signals must be uplinked from the ground station, be processed by the satellite, and be downlinked to another ground station and/or a user antenna. Since the distance between original transmission and final destination is 35,788 km times two (71,576 km), a significant delay in the system transit time is introduced. Such delays are especially noticeable in duplex communications systems. Further, satellite data throughput capabilities can be strained as more and more data is required in a geographic region.

The present invention minimizes the delay in the system by providing a shorter total communication path distance between the communicating entities (e.g. the users and the data sources). The present invention also reduces the projected beam size on the ground thus increasing "bandwidth/area." The present invention uses a "Geo-stationary" aeronautical platform that is suitable for microwave and other payloads similar to those used in satellite communications systems. Since the distance between the ground station

and the platform is around twenty km, the delay between transmission and reception is reduced to less than 0.06% of that of a geosynchronous satellite transmission system.

To account for the fact that the apparent position of the aeronautical platforms are not entirely stationary over time, the user receiving antennae have sufficient beamwidth to circumscribe the apparent position of the aeronautical platforms transceiving information with the user terminals. This permits the use of low cost antennae systems that do not track the aeronautical platforms as they move about. The gateway antennas and the platform antennas on the other hand track each other to maximize the link availability.

#### Overview

It is difficult to provide high bandwidth wireless connectivity such as that which is needed with Internet and/or multimedia applications, from the beginning of a system directly to the terminals of end users. Geosynchronous (GEO) satellites are limited by bandwidth efficiency and tend to over serve unpopulated areas and under serve highly populated areas. Conventional middle earth orbit (MEO) and low earth orbit (LEO) satellites are complex in nature and since their apparent position is not stationary over time, the user terminals are required to track the satellites. Further, conventional MEO/LEO systems require data management and data switching techniques between satellites as the satellites pass over geographic service regions. Terrestrial systems are limited by the infrastructure deployment rate and cost.

The present invention can be deployed quickly, is scaleable to markets and market sizes, and can be serviced and upgraded with new technology. The present invention can also be developed to serve transportable and/or mobile users.

FIG. 1 illustrates a system diagram of one embodiment of the present invention.

FIG. 1 illustrates system 100, which has a cellular pattern 102 that defines geographic locations on the Earth's surface. The edges of the cells 104 are not physical boundaries within the cellular pattern 102; each cell 104 represents a geographic area that can receive a signal with a predetermined signal strength or receives a antenna radiation spot in a spot beam pattern that is available from and provided by platform 106.

Platform 106 communicates with gateway antenna 108, user terminals 110-114, and control station 116. Each communication link between platform 106 and gateway antenna 108, user terminals 110-114, and control station 116 provides information to platform 106 and/or the gateway antenna 108, user terminals 110-114, and/or control station 116 as described below.

Platform 106 is a stratosphere-based platform that remains substantially stationary relative to a geographic region on the Earth. Hence, its apparent location in the sky, when viewed from the ground, remains substantially stationary as well. The platform 106 is controlled by control station 116 to fly in a small radius flight path 118, typically a circle, but can also be ellipsoidal or otherwise shaped, over a given spot on the Earth. Each platform 106 is used as a communications node for one or more gateway antennae 108 and one or more user terminals 110-114 antennae that are pointed in the direction of the platform.

In one embodiment, each of the user terminals 110-114 includes a mechanically or electrically steerable antenna to follow the platform 106 throughout the flight path 118. In another embodiment, the shape and dimensions of the beamwidth of the user terminal 110-114 antennae are such that the apparent position of the platform 106 on the flight path 118 remains within the beamwidth of the user terminal 110-114 antennae.

In this embodiment, the user terminal 110-114 antennae beamwidth is sufficient to maintain communications links with the platform 106 throughout the flight path 118 without the use of mechanical or electronic steering. The shape and dimension of the user terminal 110-114 antennae beamwidth can be matched to the shape of the flight path 118, if desired. The gateway 108 antennae are typically mechanically or electronically steerable to track the platforms 106 throughout the flight path 118.

Gateway 108 is also communicatively coupled to terrestrial network 120, which may include a connection to the Internet or another terrestrial network via land-based lines. This gives user terminals 110-114 access to the network 120 without having a direct connection through a server, as well as avoiding multiple servers, routers, etc. that may be physically between user terminals 110-114 and terrestrial network 120, thus increasing communications performance.



Ground station 116 acts as a control station for controlling one or more platforms 106 throughout system 100. Ground station 116 provides control functions, such as attitude control, altitude management, and coordination of replacement of parts and/or platforms 106 throughout system 100. Ground station 116 may also determine when and if a specific platform 106 needs repair, replacement, or maintenance functions performed, by monitoring the status of one or more platforms 106 in system 100.

The antennas and payloads used by the platform 106 and the user terminal antennas 110-114, as well as the gateways 108, allow for large data throughput in the present invention. Since there is a shorter physical distance between user terminals 110-114 and data sources, e.g., other user terminals 110-114, data warehouses, etc., the system 100 allows for users to access large amounts of data at a large rate, because the user can now be allocated system resources directly to the platform 106, that can be reused for users in other geographic areas.

Since all communications traffic go through the gateway 108 in a hub and spoke network, user terminal 110 can access data from a data warehouse connected to network 120 through platform 106 and gateway 108, without having to go through a local server, local router, and other physical hardware that may delay the delivery of data through network 120 to user terminal 110. Further, this allows user terminal 110 access to network 120, and other data sources connected to network 120, without regard to other local and/or geographically distant users, because of the direct connection that user terminal 110 has with platform 106. The gateway 108 also provides direct connectivity between user terminals.

#### System Architecture

The platforms 106 are maintained in the desired location. This can be accomplished with the use of aerodynamic control, or by other techniques. Payload modules on the platform 106, which include transmit and/or receiving antennae on the platform 106 are decoupled from the platform 106 motions with gimbals or other decoupling techniques. The platform 106, platform communication antennae, and user terminal 110-114 antennae are designed to accommodate platform 106 station keeping

dynamics. The platform 106 motion envelope is small relative to the projected beam size 104 on the ground.

The user data is processed through the gateway 108. The platforms 106 are deployed at a nominal altitude of approximately 20 kilometers. Since the platforms 106 are at such a low altitude compared with the 35,788 kilometer orbit for geosynchronous satellites, the communication system 100 has a delay latency equivalent or better than terrestrial networks for the same geographic area.

The system 100 can also use frequency, polarization and/or spatial diversities to bring bandwidth density efficiently to as high as 222 MHz/kilometer<sup>2</sup> into highly populated urban areas. The closely packed spatial diversity is analogous to orbital slots for geosynchronous satellites but is applied in two dimensions, which also allows competing systems to exist.

When the system operates at the Ka band frequency, the nominal station keeping requirement for the platform 106 is that the platform 106 should stay within a 600 meter turning radius and a  $\pm 30$  meter vertical altitude over all environment conditions. This allows for the user terminals 110-114 on the ground to use antennas that have beamwidths wide enough to maintain contact with the platform 106 without tracking the platform 106, as would be required in Low Earth Orbit (LEO) and Middle Earth Orbit (MEO) satellite constellations. The command center 116 controls the platforms 106, and provides, when necessary, spare platforms 106 to ensure a high rate of overall system availability, typically 99.9%.

The communications payload on the platform 106 can be a simple transponder design connecting the user terminals 110-114 to the gateways 108, and can also be a more complex communications system design. To achieve the bandwidth density on the user terminal 110-114 links, the multibeamers are arranged in a conventional four-cell reuse configuration, but other reuse configurations can be utilized with the present invention.

The cell 104 size can be combined with encoding schemes, such as Code Division Multiple Access (CDMA), Time Division Multiple Access (TDMA), Frequency Division Multiple Access (FDMA), or combinations of these schemes, to overcome the

interference caused by the worst case platform motions. Further, the user terminal 110-114 links can be designed for any frequency band, including Ka- and Ku-bands.

FIG. 2 illustrates a block diagram of a typical payload used with the present invention.

5 The block diagram shows one embodiment that implements the payload in a transponder configuration. The antennae 200A-200D act as transmit and receive antennas for platform 106 to/from gateway 108. Each antenna 200A-200D is coupled to diplexers 202 and amplifiers 204. The signals received by the antennas 200A-200D are downconverted using downconverters 206, and the downconverted signals are amplified by amplifiers  
10 208. Each signal is then separated into sub-bands 210 and the sub-bands 210 are further divided into user signals 212. The user signals 212 are then sent through an amplifier 214 and diplexer 216 to user antennas 218A-218B for transmission to user terminals 110-114.

The return link signals from the user terminals 110-114 are received at user  
15 antennas 218A-218B, and diplexed through diplexers 216 to an upconverter 220. Each signal is combined in combiner 222, where twelve user signals are combined in much the same fashion as they are separated into subbands 210. The signals are upconverted again at upconverter 224, and sent back to gateway 108 via antennas 200A-200D.

The bandwidth assigned to each of the beams can support a variety of multiple access techniques, including combinations of frequency division/time division multiple  
20 access (FDM/TDMA) techniques and frequency division/code division multiple access (FDM/CDMA) techniques. The packet size, code length, and other parameters for these techniques can be optimized for system throughput performance.

The available bandwidth of the signal received by a single gateway antenna 200A-200D is typically 500 MHz in each polarization, which is divided into two 250 MHz  
25 subbands. Each 250 MHz subband supports twelve user signals 212, and there are eight subbands, therefore, the platform 106 payload can support 96 user signals 212. This configuration can achieve a bandwidth of 6MHz/km<sup>2</sup> if the corresponding cell 104 size is 8 km hexagonal.

### Gateway Characteristics

FIG. 4 is a diagram of one embodiment of the gateway 108 antenna configuration.

The gateway 108 uses high frequency communications links, typically a 92-95 GHz uplink to the platform 106 and an 81-84 GHz downlink signal from the platform 106 to the gateway 108. The selection of W band for the gateway 108 has several advantages. First, the large bandwidth allows all user bandwidths be transponded to the gateway thus eliminates processing payload. Second, the higher frequency is near a minimum rain attenuation over the frequency spectrum. Third, the inherent small antenna beamwidth allows close proximity of multiple gateway antennas to serve each platform. The frequency bands within the uplink and downlink signals are polarization reused for each of the gateway 108 antenna in the system 100.

The gateways 108 are spatially separated and can use autotracking antennas to maximize data throughput to the platforms 106. Each gateway 108 may include a plurality of gateway 108 antennae 402A-402E, each separated by a distance sufficient to assure spatial diversity. In one embodiment, the gateway 108 antennae include a center antenna 402A and four peripheral antennae 402B-402E, each approximately 200 meters distant from the center antenna, and approximately 283 meters from each other. This distance permits the use of spatial diversity to permit frequency re-use.

By using a polarization/spatial diversity reuse schema, a reuse factor of eight can be achieved with a minimum of 4 gateway antennas, which yields a per-platform 106 bandwidth throughput of 24 GHz. The gateways 108 process and route the user data either externally through terrestrial networks 120, or other networks such as satellite networks, or can route data to the platform 106 directly to the user terminals 110-114 within the coverage area 102. The gateway 108 links can also use cross-polarization cancellation techniques to maintain link performance over the worst case weather scenarios, e.g., rain. Or the number of antennas and reuse factor can be optimized.

### User Terminal Characteristics

The user terminal 110-114 antenna should have a sufficient beamwidth to accommodate the platform 106 flight path 118, e.g., used for station keeping.

Simultaneously, the beamwidth of the user terminal 110-114 must be narrow enough to allow multiple platforms 106 to operate over the same coverage area 102 to further increase the bandwidth density if demand rises. Corresponding to the FIG. 2 payload at Ka band, 30 cm diameter antennas can be used for cells 104 directly underneath the platform 106, and 45 cm diameter antennas are required for cells 104 at the fringe of the coverage area to maintain communications links for the nominal E1 (2.048 MBPS) data rate.

The sidelobe level for these user terminal 110-114 antennas at Ka-band allows hexagonal packing of 37 platforms 106 as shown in FIG. 3 with minimum mutual interference. Each platform travels on flight path 118 that has a diameter  $D$  300 , where  $D$  is nominally 1200 meter if the system operates at Ka band. The distance 302 between platforms is 8.6 times  $D$ . This configuration increases bandwidth density in the overlapping region to 222 MHz/km<sup>2</sup>.

#### System Optimization

The system of the present invention can be scaled and optimized in many ways when deployed over various markets. The payload can be designed in increments of 6 GHz throughput corresponding to a single gateway 108 antenna. The antenna beams can be selectively populated to cover necessary cells 104. The payload can be upgraded and reconfigured when platforms 106 are retrieved for maintenance. The platform 106 can be optimized for tighter station keeping with smaller payloads. Correspondingly the cell 104 size can be reduced for higher bandwidth density. In turn, the overall system 100 capacity can be maintained with multiple platforms 106 over a coverage area 102.

#### Process

FIG. 5 is a flow chart illustrating exemplary steps used to practice the present invention.

Block 502 illustrates the step of receiving a first signal from the user terminal 110 having an antenna in a stratosphere-based communications platform 106, wherein the

communications platform 106 maintains an apparent position relative to the user terminal 110 within a beamwidth of the user terminal antenna.

Block 504 illustrates performing the step of transponding the first signal from the stratosphere based communications platform 106 to a gateway 108 ground station.

Block 504 illustrates performing the step of transmitting the first signal from the gateway ground station 108 to the terrestrial based network 120 or to another user terminal 110.

### Conclusion

This concludes the description of the preferred embodiment of the invention. The following paragraphs describe some alternative methods of accomplishing the same objects. The present invention, although described with respect to RF and electrical systems, can also be used with optical systems to accomplish the same goals. Further, the platforms may be stationed at different altitudes, have different packing densities, or use different payloads to accomplish substantially the same functions as described herein.

In summary, the present invention discloses a method for communicating and a communications system apparatus. The apparatus comprises a communications platform, user terminals and a gateway. The communications platform is located in a stratospheric location and communicates directly with a user terminal, receiving information from the user terminal and transmitting information to the user terminal. The gateway communicates with the communications platform and couples the user terminal with a terrestrial-based network through the communications platform. The communications system apparatus can be replicated in the densely populated area to increase total throughput.

In one embodiment, the method comprises sending full duplex signal from the user terminal to a stratosphere-based communications platform, transmitting the full duplex signal from the stratosphere-based communications platform to a gateway ground station, and transmitting the full duplex signal from the gateway ground station to the terrestrial based network.

The foregoing description of the preferred embodiment of the invention has been presented for the purposes of illustration and description. It is not intended to be exhaustive or to limit the invention to the precise form disclosed. Many modifications and variations are possible in light of the above teaching. It is intended that the scope of  
5 the invention be limited not by this detailed description, but rather by the claims appended hereto.

1103  
1102  
1101  
1099  
1098  
1097  
1096  
1095  
1094  
1093  
1092  
1091  
1090  
1089  
1088  
1087  
1086  
1085  
1084  
1083  
1082  
1081  
1080  
1079  
1078  
1077  
1076  
1075  
1074  
1073  
1072  
1071  
1070  
1069  
1068  
1067  
1066  
1065  
1064  
1063  
1062  
1061  
1060  
1059  
1058  
1057  
1056  
1055  
1054  
1053  
1052  
1051  
1050  
1049  
1048  
1047  
1046  
1045  
1044  
1043  
1042  
1041  
1040  
1039  
1038  
1037  
1036  
1035  
1034  
1033  
1032  
1031  
1030  
1029  
1028  
1027  
1026  
1025  
1024  
1023  
1022  
1021  
1020  
1019  
1018  
1017  
1016  
1015  
1014  
1013  
1012  
1011  
1010  
1009  
1008  
1007  
1006  
1005  
1004  
1003  
1002  
1001  
1000  
999  
998  
997  
996  
995  
994  
993  
992  
991  
990  
989  
988  
987  
986  
985  
984  
983  
982  
981  
980  
979  
978  
977  
976  
975  
974  
973  
972  
971  
970  
969  
968  
967  
966  
965  
964  
963  
962  
961  
960  
959  
958  
957  
956  
955  
954  
953  
952  
951  
950  
949  
948  
947  
946  
945  
944  
943  
942  
941  
940  
939  
938  
937  
936  
935  
934  
933  
932  
931  
930  
929  
928  
927  
926  
925  
924  
923  
922  
921  
920  
919  
918  
917  
916  
915  
914  
913  
912  
911  
910  
909  
908  
907  
906  
905  
904  
903  
902  
901  
900  
899  
898  
897  
896  
895  
894  
893  
892  
891  
890  
889  
888  
887  
886  
885  
884  
883  
882  
881  
880  
879  
878  
877  
876  
875  
874  
873  
872  
871  
870  
869  
868  
867  
866  
865  
864  
863  
862  
861  
860  
859  
858  
857  
856  
855  
854  
853  
852  
851  
850  
849  
848  
847  
846  
845  
844  
843  
842  
841  
840  
839  
838  
837  
836  
835  
834  
833  
832  
831  
830  
829  
828  
827  
826  
825  
824  
823  
822  
821  
820  
819  
818  
817  
816  
815  
814  
813  
812  
811  
810  
809  
808  
807  
806  
805  
804  
803  
802  
801  
800  
799  
798  
797  
796  
795  
794  
793  
792  
791  
790  
789  
788  
787  
786  
785  
784  
783  
782  
781  
780  
779  
778  
777  
776  
775  
774  
773  
772  
771  
770  
769  
768  
767  
766  
765  
764  
763  
762  
761  
760  
759  
758  
757  
756  
755  
754  
753  
752  
751  
750  
749  
748  
747  
746  
745  
744  
743  
742  
741  
740  
739  
738  
737  
736  
735  
734  
733  
732  
731  
730  
729  
728  
727  
726  
725  
724  
723  
722  
721  
720  
719  
718  
717  
716  
715  
714  
713  
712  
711  
710  
709  
708  
707  
706  
705  
704  
703  
702  
701  
700  
699  
698  
697  
696  
695  
694  
693  
692  
691  
690  
689  
688  
687  
686  
685  
684  
683  
682  
681  
680  
679  
678  
677  
676  
675  
674  
673  
672  
671  
670  
669  
668  
667  
666  
665  
664  
663  
662  
661  
660  
659  
658  
657  
656  
655  
654  
653  
652  
651  
650  
649  
648  
647  
646  
645  
644  
643  
642  
641  
640  
639  
638  
637  
636  
635  
634  
633  
632  
631  
630  
629  
628  
627  
626  
625  
624  
623  
622  
621  
620  
619  
618  
617  
616  
615  
614  
613  
612  
611  
610  
609  
608  
607  
606  
605  
604  
603  
602  
601  
600  
599  
598  
597  
596  
595  
594  
593  
592  
591  
590  
589  
588  
587  
586  
585  
584  
583  
582  
581  
580  
579  
578  
577  
576  
575  
574  
573  
572  
571  
570  
569  
568  
567  
566  
565  
564  
563  
562  
561  
560  
559  
558  
557  
556  
555  
554  
553  
552  
551  
550  
549  
548  
547  
546  
545  
544  
543  
542  
541  
540  
539  
538  
537  
536  
535  
534  
533  
532  
531  
530  
529  
528  
527  
526  
525  
524  
523  
522  
521  
520  
519  
518  
517  
516  
515  
514  
513  
512  
511  
510  
509  
508  
507  
506  
505  
504  
503  
502  
501  
500  
499  
498  
497  
496  
495  
494  
493  
492  
491  
490  
489  
488  
487  
486  
485  
484  
483  
482  
481  
480  
479  
478  
477  
476  
475  
474  
473  
472  
471  
470  
469  
468  
467  
466  
465  
464  
463  
462  
461  
460  
459  
458  
457  
456  
455  
454  
453  
452  
451  
450  
449  
448  
447  
446  
445  
444  
443  
442  
441  
440  
439  
438  
437  
436  
435  
434  
433  
432  
431  
430  
429  
428  
427  
426  
425  
424  
423  
422  
421  
420  
419  
418  
417  
416  
415  
414  
413  
412  
411  
410  
409  
408  
407  
406  
405  
404  
403  
402  
401  
400  
399  
398  
397  
396  
395  
394  
393  
392  
391  
390  
389  
388  
387  
386  
385  
384  
383  
382  
381  
380  
379  
378  
377  
376  
375  
374  
373  
372  
371  
370  
369  
368  
367  
366  
365  
364  
363  
362  
361  
360  
359  
358  
357  
356  
355  
354  
353  
352  
351  
350  
349  
348  
347  
346  
345  
344  
343  
342  
341  
340  
339  
338  
337  
336  
335  
334  
333  
332  
331  
330  
329  
328  
327  
326  
325  
324  
323  
322  
321  
320  
319  
318  
317  
316  
315  
314  
313  
312  
311  
310  
309  
308  
307  
306  
305  
304  
303  
302  
301  
300  
299  
298  
297  
296  
295  
294  
293  
292  
291  
290  
289  
288  
287  
286  
285  
284  
283  
282  
281  
280  
279  
278  
277  
276  
275  
274  
273  
272  
271  
270  
269  
268  
267  
266  
265  
264  
263  
262  
261  
260  
259  
258  
257  
256  
255  
254  
253  
252  
251  
250  
249  
248  
247  
246  
245  
244  
243  
242  
241  
240  
239  
238  
237  
236  
235  
234  
233  
232  
231  
230  
229  
228  
227  
226  
225  
224  
223  
222  
221  
220  
219  
218  
217  
216  
215  
214  
213  
212  
211  
210  
209  
208  
207  
206  
205  
204  
203  
202  
201  
200  
199  
198  
197  
196  
195  
194  
193  
192  
191  
190  
189  
188  
187  
186  
185  
184  
183  
182  
181  
180  
179  
178  
177  
176  
175  
174  
173  
172  
171  
170  
169  
168  
167  
166  
165  
164  
163  
162  
161  
160  
159  
158  
157  
156  
155  
154  
153  
152  
151  
150  
149  
148  
147  
146  
145  
144  
143  
142  
141  
140  
139  
138  
137  
136  
135  
134  
133  
132  
131  
130  
129  
128  
127  
126  
125  
124  
123  
122  
121  
120  
119  
118  
117  
116  
115  
114  
113  
112  
111  
110  
109  
108  
107  
106  
105  
104  
103  
102  
101  
100  
99  
98  
97  
96  
95  
94  
93  
92  
91  
90  
89  
88  
87  
86  
85  
84  
83  
82  
81  
80  
79  
78  
77  
76  
75  
74  
73  
72  
71  
70  
69  
68  
67  
66  
65  
64  
63  
62  
61  
60  
59  
58  
57  
56  
55  
54  
53  
52  
51  
50  
49  
48  
47  
46  
45  
44  
43  
42  
41  
40  
39  
38  
37  
36  
35  
34  
33  
32  
31  
30  
29  
28  
27  
26  
25  
24  
23  
22  
21  
20  
19  
18  
17  
16  
15  
14  
13  
12  
11  
10  
9  
8  
7  
6  
5  
4  
3  
2  
1  
0

CLAIMS

What is Claimed is:

1           1.       A communications system, comprising:  
2       a gateway, communicatively coupleable to a terrestrially-based network;  
3           a communications platform disposed in a stratospheric location, for transponding  
4       information between at least one of a plurality of user terminals and the gateway.

1           2.       The communications system of Claim 1, wherein the gateway aggregates  
2       all data traffic comprising the information between the plurality of user terminals.

1           3.       The communications system of Claim 1, wherein the gateway aggregates  
2       all data traffic comprising the information between each of the user terminals and the  
3       terrestrially-based network.

1           4.       The communications system of Claim 1, wherein:  
2       the user terminal includes a user terminal antenna characterizable by a beamwidth;  
3       and  
4       the communications platform maintains an apparent position relative to the user  
5       terminal within the beamwidth of the user terminal antenna.

1           5.       The communications system of Claim 1, wherein the system comprises  
2       more than one communications platform.

1           6.       The communications system of Claim 5, wherein the gateway  
2       communicates with more than one communications platform.

1           7.       The communications system of Claim 6, wherein the user terminal  
2       communicates with only one communications platform.



1           8.     The communications system of Claim 1, wherein the user terminal  
2 communicates with the communications platform in a first frequency band, and the  
3 communications platform communicates with the gateway in a second frequency band.

1           9.     The communications system of Claim 1, wherein the stratospheric location  
2 of he communications platform is within a predetermined distance of the user terminal to  
3 maintain communications between the communications platform and the user terminal.

1           10.    The communications system of Claim 1, wherein the gateway comprises a  
2 plurality of gateway antennae, separated from each other by a distance sufficient to  
3 provide spatial diversity in communicating with the communications platform.

1           11.    The communications system of claim 10, wherein the user terminals  
2 communicate with the communications platform using a communication diversity  
3 selected from the group comprising:  
4           spatial diversity; and  
5           polarization diversity.

1           12.    The communications system of Claim 1, wherein the system comprises at  
2 least two communication platforms in overlapping positions.

1           13.    The communications system of claim 1, wherein each user terminal is  
2 associated with a cell and user terminals in overlapping cells communicate with different  
3 communications platforms through spatial diversity.

1           14.    The communication system of Claim 1, wherein the information is  
2 transponded according to a coding technique selected from the group comprising time  
3 division multiple access (TDMA) and code division multiple access (CDMA).

0021054-11200

1           15.    A communications signal, generated by performing the steps of:  
2           receiving a first signal from a user terminal having a user terminal antenna in a  
3           stratosphere-based communications platform, wherein the communications platform  
4           maintains an apparent position relative to the user terminal within a beamwidth of the  
5           user terminal antenna; and  
6           transponding the first signal from the stratosphere-based communications  
7           platform to a gateway ground station.

1           16.    The signal of claim 15, wherein the terrestrially-based network is the  
2           Internet.

1           17.    The signal of claim 15, wherein the first signal is transmitted in one of a  
2           plurality of beams to the gateway ground station having a plurality of antennae disposed  
3           to provide spatial diversity among each of the plurality of beams.

1           18.    A method for communicating from a user terminal, comprising:  
2           receiving a first signal from the user terminal having an antenna in a stratosphere-  
3           based communications platform, wherein the communications platform maintains an  
4           apparent position relative to the user terminal within a beamwidth of a user terminal  
5           antenna;  
6           transponding the first signal from the stratosphere-based communications  
7           platform to a gateway ground station.

1 19. The method of claim 18, further comprising the steps of:  
2 receiving the first signal from the gateway ground station in the communications  
3 platform; and  
4 transponding the first signal from the communications platform to a second user  
5 terminal.

1 20. The method of claim 18, further comprising the steps of:  
2 transmitting the first signal from the gateway ground station to the terrestrially-  
3 based network.

1 21. The method of claim 20, wherein the terrestrially-based network is the  
2 Internet.

1 22. The method of claim 18, wherein the first signal is transponded by one of a  
2 plurality of beams to the gateway ground station having a plurality of antennae disposed  
3 to provide spatial diversity among each of the plurality of beams.

1 23. A communications system, comprising:  
2 a user terminal for transmitting and receiving data through a terrestrial-based  
3 network; and  
4 wherein the user terminal communicates with a gateway via a stratospheric-based  
5 communications platform transponder.

1 24. The communications system of claim 23, wherein:  
2 the user terminal includes a user terminal antenna characterizable by a beamwidth;  
3 and  
4 the communications platform maintains an apparent position relative to the user  
5 terminal within the beamwidth of the user terminal antenna.

1           25.     The communications system of claim 23, wherein the user terminal  
2     communicates with the communications platform in a first frequency band, and the  
3     communications platform communicates with the gateway in a second frequency band.

1           26.     The communications system of claim 23, wherein the gateway comprises a  
2     plurality of gateway antennae, separated from each other by a distance sufficient to  
3     provide spatial diversity in communicating with the communications platform.

1           27.     The communications system of claim 26, wherein the distance is at least  
2     200 meters.

## GEO STATIONARY COMMUNICATIONS SYSTEM WITH MINIMAL DELAY

### ABSTRACT OF THE DISCLOSURE

- 5 A method for communicating and a communications system apparatus are disclosed. The apparatus comprises a communications platform and a gateway communicatively coupleable with a terrestrially-based network. The communications platform is disposed in a stratospheric location and transponds information between at least one of a plurality of user terminals and the gateway in essentially a bent pipe
- 10 fashion. The method comprises the steps of receiving a first signal from the user terminal having an antenna in a stratospherically-based communication platform that maintains an apparent position relative to the user terminal within a beamwidth of a user terminal antenna and transponding the first signal from the stratospherically based communications platform to a gateway ground station.

CLAIMS

What is Claimed is:

1           1.       A communications system, comprising:  
2       a gateway (108), communicatively coupleable to a terrestrially-based network (120);  
3           a communications platform (106) disposed in a stratospheric location, for  
4       transponding information between at least one of a plurality of user terminals (110) and  
5       the gateway (108).

1           2.       The communications system of Claim 1, wherein the gateway (108)  
2       aggregates all data traffic comprising the information between the plurality of user  
3       terminals (110).

1           3.       The communications system of Claim 1, wherein the gateway (108)  
2       aggregates all data traffic comprising the information between each of the user terminals  
3       (110) and the terrestrially-based network (120).

1           4.       The communications system of Claim 1, wherein:  
2               the user terminal (110) includes a user terminal antenna characterizable by a  
3       beamwidth; and  
4               the communications platform (106) maintains an angular position relative to the  
5       user terminal (110) within the beamwidth of the user terminal antenna.

1           5.       The communications system of Claim 1, wherein the user terminal (110)  
2       communicates with the communications platform (106) in a first frequency band, and the  
3       communications platform communicates with the gateway (108) in a second frequency  
4       band.

6. The communications system of Claim 5, wherein the user terminals (110) communicate with the communications platform (106) using a communication diversity selected from the group comprising:  
spatial diversity; and  
polarization diversity.

7. The communications system of Claim 1, wherein the system comprises at least two communication platforms in overlapping positions.

8. The communications system of claim 1, wherein each user terminal is associated with a cell and user terminals (110) in overlapping cells (104) communicate with different communications platforms through spatial diversity.

9. The communication system of Claim 1, wherein the information is transponded according to a coding technique selected from the group comprising time division multiple access (TDMA) and code division multiple access (CDMA).

10. The communications system of Claim 1, wherein the stratospheric location of the communications platform (106) is maintained within a distance of the user terminal (110) to maintain communications between the communications platform (106) and the user terminal (110).

11. The communications system of Claim 1, wherein the gateway (108) comprises a plurality of gateway antennae (402), separated from each other by a distance sufficient to provide spatial diversity in communicating with the communications platform (106).

1           12.    A method for transmitting information from a user terminal (110),  
2   comprising:  
3           receiving a first signal from the user terminal (110) having an antenna in a  
4   stratosphere-based communications platform (106), wherein the communications  
5   platform (106) maintains an apparent position relative to the user terminal (110) within a  
6   beamwidth of a user terminal antenna;  
7           transponding the first signal from the stratosphere-based communications  
8   platform (106) to a gateway (108).

1           13.    The method of claim 12, further comprising the steps of:  
2   receiving the first signal from the gateway (108) in the communications platform  
3   (106); and  
4   transponding the first signal from the communications platform (106) to a second  
5   user terminal (110).

1           14.    The method of claim 12, further comprising the steps of:  
2   transmitting the first signal from the gateway (108) to the terrestrially-based  
3   network (120).

1           15.    The method of claim 14, wherein the terrestrially-based network (120) is  
2   the Internet.

1           16.    The method of claim 12, wherein the first signal is transponded by one of a  
2   plurality of beams to the gateway (108) having a plurality of antennae disposed to provide  
3   spatial diversity among each of the plurality of beams.



GEO STATIONARY COMMUNICATIONS SYSTEM WITH MINIMAL DELAY

ABSTRACT OF THE DISCLOSURE

A method for communicating and a communications system apparatus are disclosed. The apparatus comprises a communications platform (106) and a gateway (108) communicatively coupleable with a terrestrially-based network (120). The communications platform (106) is disposed in a stratospheric location and transponds information between at least one of a plurality of user terminals (110) and the gateway (108) in essentially a bent pipe fashion. The method comprises the steps of receiving a first signal from the user terminal (110) having an antenna in a stratospherically-based communication platform (106) that maintains an apparent position relative to the user terminal (110) within a beamwidth of a user terminal antenna and transponding the first signal from the stratospherically based communications platform (106) to a gateway (108).

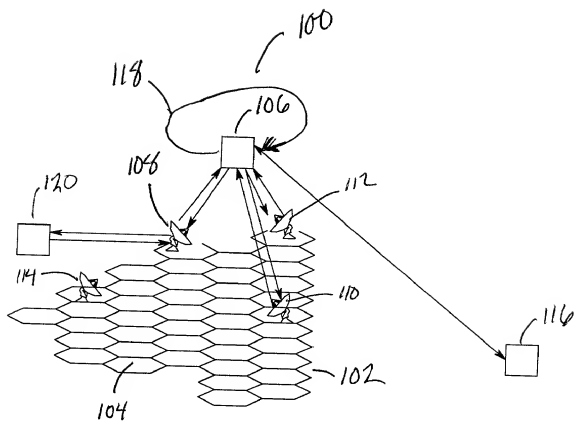


FIG. 1

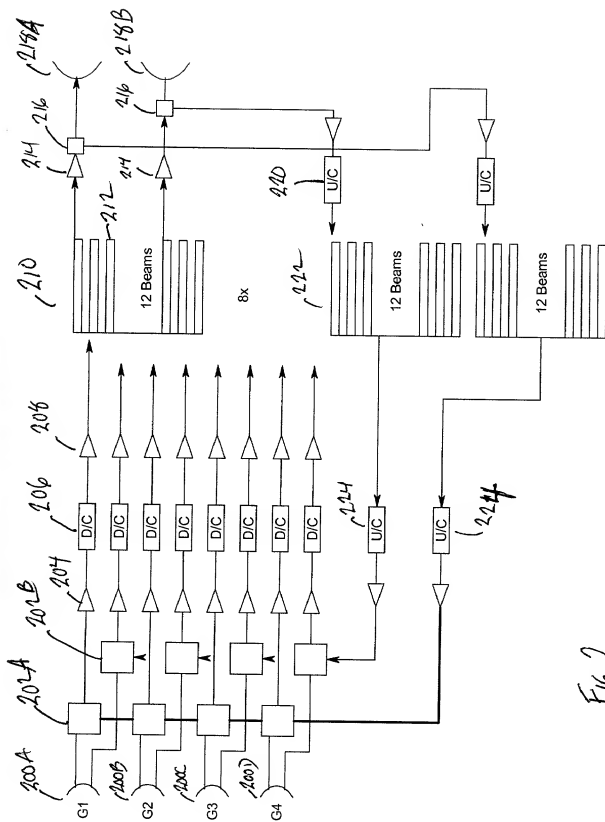
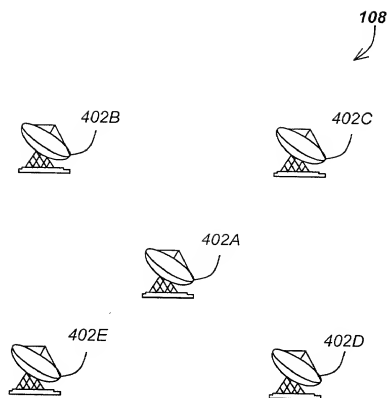
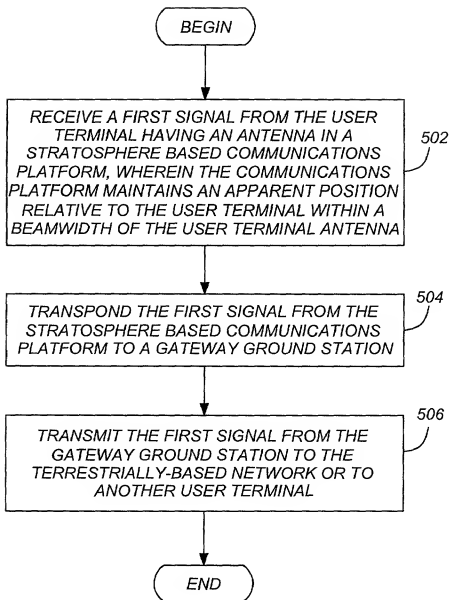


Fig. 2






**FIG. 4**



**FIG. 5**

United States Patent & Trademark Office  
Office of Initial Patent Examination -- Scanning Division



SCANNED # \_\_\_\_\_

Application deficiencies were found during scanning:

☐ Page(s) \_\_\_\_\_ of \_\_\_\_\_ were not present  
for scanning. (Document title)

☐ Page(s) \_\_\_\_\_ of \_\_\_\_\_ were not present  
for scanning. (Document title)

☐ Scanned copy is best available.

*There are 2 sets of claims*